

Z300 Series



32

Door Closer

General Specification

- 1 Hour Fire Rating
- Hydraulic control
- Adjustable latching speed
- Adjustable closing speed
- Supplied with parallel arm bracket
- Aluminium body
- Steel arm
- Universal screw pack
- 3 spring strengths



Certifire Approved
Conforms to BS EN154

Technical Specification

Underwriter Laboratories Inc. listed. The series is a recently developed economical door closer with many of the engineering characteristics of a top range closer. Compact design. Die cast aluminium housing. Universal application. Non handed for standard, top jamb, or parallel arm installation. Available in 3 strengths. Fixing for both metal and timber doors.

Adjustment


Two independent valves providing hydraulic control from 180 degrees of closing sweep and 15 degrees of latching. Fully adjustable after installation

Finish


Excellent silver finish. Other colours obtainable on special request.

Accessories

Flat drop bracket for installation on door or door frame when direct fixing is not possible. Hold open arm adjustable for any degree of retention. Parallel bracket for hold-open arms. Special purpose accessories, to cover the most difficult of applications are also obtainable on special order.

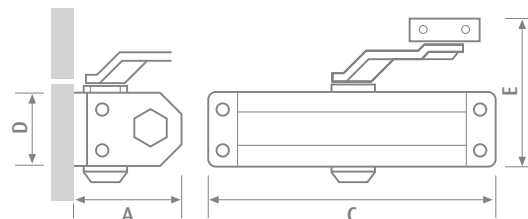

Closing Range & Adjustment

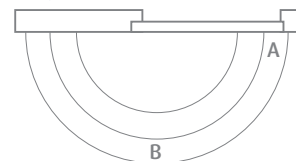

A. Latching Range
B. Closing Range

Closer Dimensions	300 Series			
	302	303	304	
Projection from Door	A	60.2	60.5	60.6
Height of closer body	B	41	41	41
Length of closer body	C	182	182	182
Top of door to bottom of closer	D	49	49	49
Overall height	E	102	102	102
Approx. shipping weight in kgs		1.3	1.3	1.3

32